





CODE MODEL

WD D - 1.3 / 7

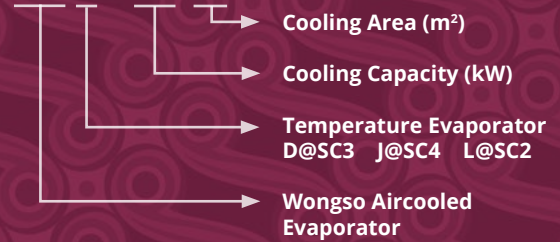

Standard Condition	Room Temp.	Evaporation Temp.
SC	(°C)	T _E (°C)
SC1	10	0
SC2	0	-8
SC3	-18	-25
SC4	-25	-31
SC5	-34	-40

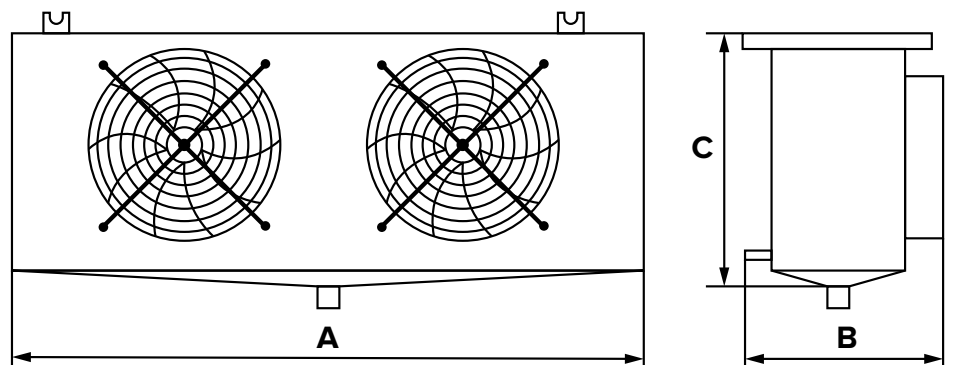

WDD EVAPORATOR SERIES FREEZER (FIN SPACING: 6mm)

Model	R404 Cooling Capacity SC3	Cooling Area	Fan Motor				Heater Power	Liquid Inlet Tube	Suction Tube	Dimension		
			Qty	Dia.	Power	Air Vol.				A	B	C
			n	mm	W	m ³ /h				mm	mm	mm
WDD-1.3/7	1300	7	1	Φ 350	150	3110	3x0.5	Φ 12	Φ 16	780	360	465
WDD-2.2/12	2200	12	2	Φ 350	150	3110	3x0.9	Φ 12	Φ 16	1145	360	465
WDD-2.8/15	2800	15	2	Φ 350	150	3110	3x0.9	Φ 12	Φ 16	1145	360	465
WDD-3.7/22	3700	22	2	Φ 350	150	3110	3x1.2	Φ 12	Φ 16	1310	500	480
WDD-5.6/30	5600	30	2	Φ 400	280	5100	3x1.5	Φ 16	Φ 25	1530	500	565
WDD-7.5/40	7500	40	2	Φ 400	280	5100	3x1.5	Φ 16	Φ 25	1530	500	565
WDD-11.2/60	11200	60	2	Φ 500	640	8500	6x1.3	Φ 19	Φ 38	1830	670	670
WDD-14.9/80	14900	80	2	Φ 500	640	8500	6x1.5	Φ 19	Φ 38	1830	670	670
WDD-18.7/100	18700	100	3	Φ 500	640	8500	6x1.9	Φ 19	Φ 38	2310	670	670
WDD-22.4/120	22400	120	3	Φ 500	640	8500	6x2.4	Φ 19	Φ 38	2730	670	670
WDD-26.2/140	26200	140	4	Φ 500	640	8500	6x2.6	Φ 25	Φ 50	3130	670	670
WDD-30.0/160	30000	160	4	Φ 500	640	8500	6x2.8	Φ 25	Φ 50	3530	670	670
WDD-37.4/200	37400	200	4	Φ 500	640	8500	7x2.6	Φ 25	Φ 50	2710	960	860
WDD-46.2/250	46200	250	4	Φ 500	640	8500	9x2.6	Φ 25	Φ 50	2710	960	860
WDD-57.3/310	57300	310	3	Φ 630	850	10800	9x2.8	Φ 25	Φ 50	3190	960	860
WDD-66.6/380	66600	380	3	Φ 630	850	10800	12x2.4	Φ 25	Φ 50	3500	1050	990
WDD-81.4/450	81400	450	4	Φ 630	850	10800	12x2.6	Φ 28	Φ 50	4120	1050	990

WDJ EVAPORATOR SERIES FREEZER (FIN SPACING: 9mm)

Model	R404 Cooling Capacity SC4	Cooling Area	Fan Motor				Heater Power	Liquid Inlet Tube	Suction Tube	Dimension		
			Qty	Dia.	Power	Air Vol.				A	B	C
			W	m ²	n	mm				W	m ³ /h	mm
WDJ-1.2/8	1200	8	2	Φ 350	150	3110	3 X 0.9	Φ 12	Φ 16	1145	360	465
WDJ-2.1/15	2100	15	3	Φ 350	150	3110	3 X 1.2	Φ 12	Φ 16	1590	430	480
WDJ-3.6/20	3600	20	2	Φ 400	280	5100	3 X 1.5	Φ 16	Φ 25	1530	500	565
WDJ-4.6/30	4600	30	2	Φ 400	280	5100	3 X 1.5	Φ 16	Φ 25	1530	500	565
WDJ-7.1/40	7100	40	2	Φ 500	640	8500	6 X 1.3	Φ 19	Φ 38	1830	560	670
WDJ-8.9/55	8900	55	2	Φ 500	640	8500	6 X 1.5	Φ 19	Φ 38	1830	560	670
WDJ-11.6/70	11600	70	3	Φ 500	640	8500	6 X 1.9	Φ 19	Φ 38	2310	560	670
WDJ-14.3/85	14300	85	3	Φ 500	640	8500	6 X 2.4	Φ 19	Φ 38	2730	560	670
WDJ-17.1/100	17100	100	4	Φ 500	640	8500	6 X 2.6	Φ 25	Φ 50	3130	560	670
WDJ-19.6/115	19600	115	4	Φ 500	640	8500	6 X 2.8	Φ 25	Φ 50	3530	560	670
WDJ-23.1/140	23100	140	2	Φ 630	850	10800	7 X 2.6	Φ 25	Φ 50	2210	960	890
WDJ-28.0/170	28000	170	3	Φ 630	850	10800	9 X 2.6	Φ 25	Φ 50	3530	740	890
WDJ-34.6/210	34600	210	3	Φ 630	850	10800	9 X 2.8	Φ 25	Φ 50	3530	960	890
WDJ-41.2/255	41200	255	3	Φ 630	850	10800	12 X 2.4	Φ 25	Φ 50	3530	1050	990
WDJ-49.5/295	49500	300	4	Φ 630	850	10800	12 X 2.6	Φ 25	Φ 50	4320	1050	990

WDL EVAPORATOR SERIES CHILLER (FIN SPACING: 4.5 mm)

Model	R404 Cooling Capacity SC2	Cooling Area	Fan Motor				Heater Power	Liquid Inlet Tube	Suction Tube	Dimension		
			Qty	Dia.	Power	Air Vol.				A	B	C
			W	m ²	n	mm				W	m ³ /h	mm
WDL-2.0/10	2000	10	1	Φ 300	150	3110	2x0.5	Φ 12	Φ 16	740	360	465
WDL-3.0/15	3000	15	2	Φ 300	150	3110	2x0.9	Φ 12	Φ 16	1590	430	480
WDL-5.0/25	5000	25	2	Φ 350	280	5100	2x1.2	Φ 12	Φ 16	1530	500	565
WDL-8.0/40	8000	40	2	Φ 400	280	5100	3x1.3	Φ 16	Φ 25	1530	500	565
WDL-11.2/55	11200	55	2	Φ 400	280	5100	3x1.3	Φ 16	Φ 25	1830	560	670
WDL-16.2/80	16200	80	2	Φ 500	640	8500	3x1.3	Φ 19	Φ 38	1830	560	670
WDL-21.3/105	21300	105	2	Φ 500	640	8500	3x1.5	Φ 19	Φ 38	2310	560	670
WDL-25.0/125	25000	125	3	Φ 500	640	8500	3x1.9	Φ 19	Φ 38	2730	560	670
WDL-32.6/160	32600	160	3	Φ 500	640	8500	3x2.4	Φ 19	Φ 38	3130	560	670
WDL-37.6/185	37600	185	4	Φ 500	640	8500	3x2.6	Φ 25	Φ 50	3530	560	670
WDL-42.7/210	42700	210	4	Φ 500	640	8500	3x2.8	Φ 25	Φ 50	3510	680	770
WDL-52.9/260	52900	260	4	Φ 500	640	8500	4x2.6	Φ 25	Φ 50	3510	680	770
WDL-66.0/330	32600	330	4	Φ 550	850	10500	5x2.6	Φ 25	Φ 50	3530	780	970
WDL-82.0/410	85000	410	3	Φ 630	850	10800	5x2.8	Φ 25	Φ 50	3190	900	970
WDL-94.0/500	94000	500	3	Φ 630	850	10800	6x2.4	Φ 25	Φ 50	3470	1050	970
WDL-116/600	116000	600	4	Φ 630	850	10800	6x2.6	Φ 25	Φ 50	4120	1050	970